

# **Power Transformer Chassis Mount: Quick Pack**

# FD4-120

# **Description:**

The FD4-120 Quick Pack small power transformer offers a significant reduction in size and weight over a standard transformer. This transformer can be used for a wide variety of applications. It is bobbin wound for reduced size and small operating space.

#### Electrical Specifications (@25C); Maximum Power: 6.0VA

#### Input Voltage:

Series: 230VAC@50/60Hz Parallel: 115VAC@50/60Hz Output Voltage: 120VCT@0.05A Hipot: 2500VAC primary to secondary; 1500VAC windings to core.

## **Construction:**

Split bobbin non concentric winding eliminates costly electrostatic shielding. Termination is suitable for quick connects or soldering. Built with UL Class B Insulation System.

#### Safety:

UL: File E53148, UL 5085-1 and 2 (formerly UL 506), General Purpose.




# Dimensions:

А	В	С	D	E	F	G
1.375	2.0±.03	2.375	1.250	1.687	.187 Dia	.687

Notes: 1. Units: inches.

- 2. Terminal size: .187" X 0.021".
- 3. Weight: .44 lbs

## Schematic:



Input (115V): Input 1 & 2 Connect 1&3, 2&4 Input (230V): Input 1 & 4 Connect 2&3

Output: 5 & 8


**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571



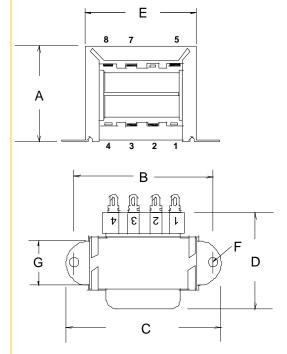

Publish Date: May 29, 2019