

# POWER TRANSFORMER PC MOUNT: SPLIT PACK

# F36-550

# **Description:**

The F36-550 is a single primary and dual secondary, split bobbin design which operates with an input of 115V. The output voltage will be either 36.0V with a center-tap under a 0.55A load with the secondaries wired in series, or 18.0V under a 1.1A load with the secondaries wired in parallel. The split bobbin design eliminates the need for costly electrostatic shielding.

# **Electrical Specifications (@25C)**

1. Maximum Power: 20.0VA

Primary: 115V

3. Secondary: Series: 36.0V CT@ 0.55A

Parallel: 18.0V @ 1.1A

4. Voltage Regulation: 25% TYP @ full load to no load

5. Temperature Rise: 25C TYP

6. Hipot tested 100% at 2500 VRMS

#### **Construction:**

Three flange bobbin construction with primaries and secondaries wound side by side for low capacitive coupling.

### Agency File:

UL: File E53148, UL 5085-2 (506), Class B General Purpose Transformer, cUL: File E53148, UL 5085-2 (506), Class B General Purpose Transformer, Canadian Use (CSA 22.2, No.66.2-06)

This model is also available in Class 3, UL 5085-3 (1585) version as F36-550-C2




Dimen	sions:				U	nits in in	ches.
1.1	14/	۸	_	^		_	_

1.437   1.875   2.25   0.300   0.400   1.600   0.041   0.020   0.234	Ι	W	L	Α	В	С	D	Е	F
	1.437	1.875	2.25	0.300	0.400	1.600	0.041	0.020	0.234

Weight: 0.80 lbs

#### **Schematic:**





**RoHS Compliance:** As of manufacturing date February 2016, all standard products meet the requirements of 2015/863/EU, known as the RoHS 3 initiative.

As of April 7, 2008, UL standards 506 and 1585 will be migrated to UL 5085-2 and 5085-3, respectively.

\*Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics website for the most current version. For soldering and washing information please see http://www.triadmagnetics.com/faq.html



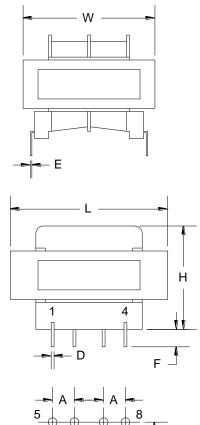



**Board Layout** 

Web: www.TriadMagnetics.com Phone 951-277-0757 Fax 951-277-2757

460 Harley Knox Blvd. Perris, California 92571

Publish Date: May 1, 2019